


Medidas y datos: Anilla de elevación giratoria-Vario VWBG-V 2,0-M22 (F=33)


Nº de artículo 8600334

weight:	1,45 kg	3,20 lbs
Nominal WLL:	2000 kg	4400 lbs
A:	13 mm	1/2"
B:	54 mm	2-1/8"
T:	137 mm	5-3/8"
C:	35 mm	1-3/8"
D:	62 mm	2-7/16"
E:	55 mm	2-5/32"
F:	33 mm	1-5/16"
G:	67 mm	2-5/8"
M:	M22	M22

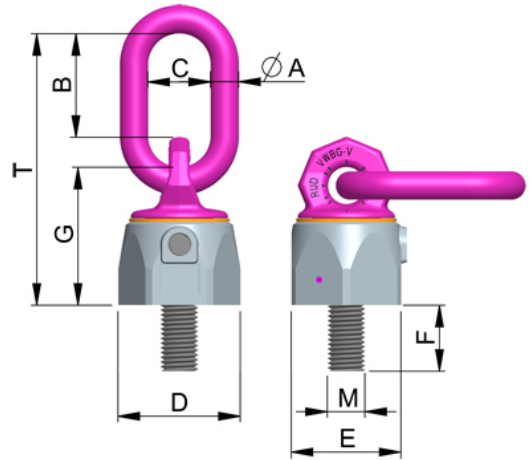


Max. peso transportable en kg para diferentes tipos de carga

1 Ramal:

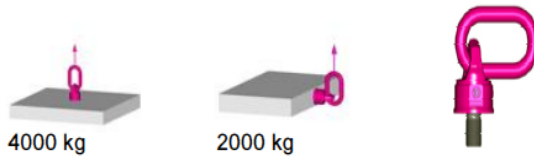


2 Ramales:

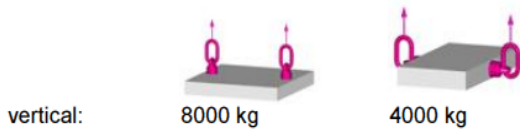


vertical:

3/4 Ramales:*



12000 kg

6000 kg

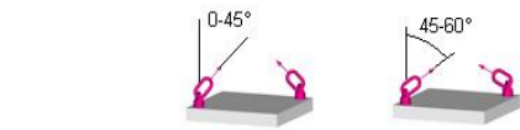

simétrico:


2800 kg

2000 kg




4200 kg

3000 kg



Asimétrico:

2000 kg




2000 kg

Si la anilla se ajusta manualmente a su posición horizontal, se podrán alcanzar mayores CMU. Rogamos se aseguren de que la configuración de la carga no sea modificada durante la elevación



1 Ramal:




2500 kg


2 Ramales:

3/4 Ramales:*

vertical:




5000 kg




7500 kg


simétrico:




3500 kg




2500 kg




5250 kg



3750 kg



2500 kg



2500 kg