


Medidas y datos: Anilla de elevación giratoria-Vario VWBG-V 3,5-M24


Nº de artículo: Z100640

weight:	2,63 kg	5,80 lbs
Nominal WLL:	3500 kg	7700 lbs
A:	18 mm	23/32"
B:	66 mm	2-5/8"
T:	173 mm	6-13/16"
C:	40 mm	1-9/16"
D:	81 mm	3-3/16"
E:	70 mm	2-3/4"
F:	40 mm	1-9/16"
G:	88 mm	3-15/32"
M:	M24	M24

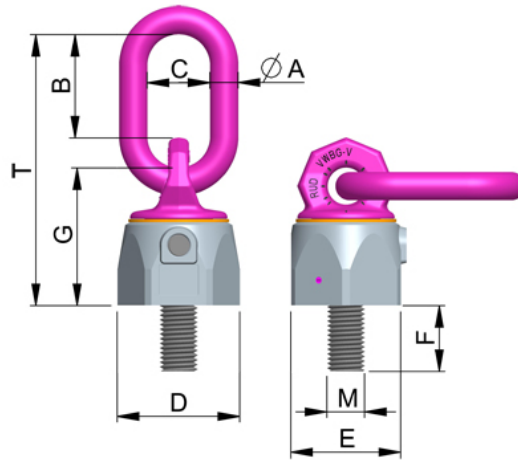


Max. peso transportable en kg para diferentes tipos de carga

1 Ramal:




7000 kg



3500 kg



2 Ramales:




14000 kg




7000 kg

vertical:



4900 kg



3500 kg


simétrico:



3500 kg

Asimétrico:


3/4 Ramales:*




21000 kg




10500 kg



7350 kg



5250 kg




3500 kg

Si la anilla se ajusta manualmente a su posición horizontal, se podrán alcanzar mayores CMU. Rogamos se aseguren de que la configuración de la carga no sea modificada durante la elevación




1 Ramal:




2 Ramales:

vertical:



3/4 Ramales:*



simétrico:

