


**Medidas y datos: Anilla de elevación giratoria-roscada VWBG 16(25)t-M64**


Nº de artículo: Z999043

<b>weight:</b>	11,40 kg	25,13 lbs
<b>Nominal WLL:</b>	16000 kg	35200 lbs
<b>A:</b>	32 mm	1-1/4"
<b>B:</b>	119 mm	4-11/16"
<b>T:</b>	274 mm	10-25/32"
<b>C:</b>	70 mm	2-3/4"
<b>D:</b>	120 mm	4-3/4"
<b>E:</b>	95 mm	3-3/4"
<b>F:</b>	94 mm	3-11/16"
<b>G:</b>	120 mm	4-3/4"
<b>M:</b>	M64	M64

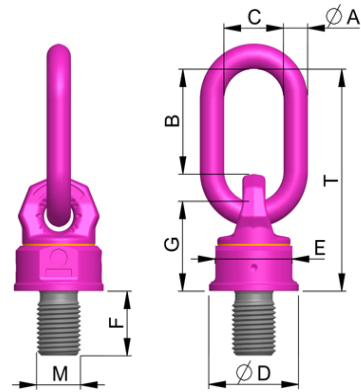


**Max. peso transportable en kg para diferentes tipos de carga**


**1 Ramal:**

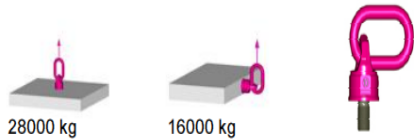


**2 Ramales:**



**3/4 Ramales:\***



vertical:




simétrico:

22400 kg      16000 kg




33600 kg      24000 kg



Asimétrico:

16000 kg




16000 kg

Si la anilla se ajusta manualmente a su posición horizontal, se podrán alcanzar mayores CMU. Rogamos se aseguren de que la configuración de la carga no sea modificada durante la elevación




**1 Ramal:**



25000 kg


**2 Ramales:**

vertical:




50000 kg

**3/4 Ramales:\***




75000 kg


simétrico:




35000 kg




25000 kg




52500 kg



37500 kg



25000 kg



25000 kg